

Rain-Flo IRRIGATION™

When Quality Counts



DEALER

Thomas Bros. Equipment Sales, Inc.
41764 Red Arrow Hwy.

Paw Paw, Michigan 49079

269-657-3735 Fax: 269-657-2110

Toll Free: 866-214-6135

tbrofab@gmail.com

www.thomasbrosequipmentsales.com



New Equipment Models For 2021!

Primary Features

- **New User Friendly Cover Disk Adjustment on Mulch Layers**
 - Standard with Turn Buckles that are Adjustable while Driving
 - Optional Hydraulic Adjustment from Operator Seat
 - Full Cover Disk Adjustment without Tools
- Redesigned Side Chisel to Move More Soil
- New Ro-Trak Steering Bar for Easier Hook-up
- Operator Seat on Angle
- Operator Hand Railing
- Larger Trench Openers
- Spring Loaded Cover Disk & Press Wheel
- Extra Narrow Model 2470 for High Tunnels
- New Accent Color for all Models



Redesigned Side Chisel



Turnbuckle Disk Adjustment



New Ro-Trak Steering Bar



Model 480 Plastic Mulch Layer



User Friendly Disk Adjustment



Auto Start & Plastic Mulch Cutter



New Concept For Firmer Bed

Features

- 60" row centers, 80 hp FWD Minimum
- Adjustable bed height; 4" or 8"
- Lays 48" plastic only
- Automatic steering correction (Ro-trak)
- Automatically starts standard plastic film
- Manual plastic & drip tape cutters
- On the go plastic roll change
- On the go cover disk adjustment
- Adjustable crowned or flat bed top

- Adjustable brake tension on plastic roll carriers
- Adjustable row markers
- Category II, 3-point hitch
- With operator seat
- Replaceable, reversible plow share blades
- UHMW (replaceable) poly lined bed press

Options

- Single or double drip attachment
- Hydraulic cover disk adjustment



December 10% Off

Replaces Model 2600

Model 2670 Plastic Mulch Layer



Automatic Rotrak



Hydraulic Cover Disk Adjustment



Center Fillers

Features

- 64" row centers with 4' plastic, 70 hp FWD minimum
- Adjustable plastic width from 3 ft. to 5 ft. wide plastic
- Adjustable bed height from 5" to 9" high bed
- On the go cover disk adjustment
- Adjustable brake tension on plastic roll carriers
- Bed press has adjustable side press plates
- With operator seat
- Adjustable row marker
- Replaceable, reversible plow share blades
- UHMW (replaceable) poly lined bed press
- Spring loaded shovels on side, help loosen soil for cover disk
- Category II, 3-point hitch

Options

- Automatic steering correction (Ro-trak) for hill sides
- Hydraulic cover disk adjustment
- Single or double drip attachment
- Crowned bed press for level field
- Center fillers, to help fill center of bed
- 400 lb. Stainless steel ground driven fertilizer hopper
- Fumigation tank mounts with gas knives



December 10% Off

Replaces Model 2550

Model 2570 Plastic Mulch Layer



Automatic Ro-trak Sensor



Crowned Raised Bed



Center Fillers

Features

- 60" row centers with 4' plastic, 60 hp FWD minimum
- Adjustable plastic width from 3 ft. or 4 ft. wide plastic
- Adjustable bed height from 3" to 7" high bed
- On the go cover disk adjustment
- Adjustable brake tension on plastic roll carriers
- Bed press has adjustable side press plates
- With operator seat
- Adjustable row marker
- Replaceable, reversible plow share blades
- UHMW (replaceable) poly lined bed press
- Spring loaded shovels on side, help loosen soil for cover disk
- Category II, 3-point hitch

Options

- Automatic steering correction (Ro-trak) for hill sides
- Hydraulic cover disk adjustment
- Single or double drip attachment
- Crowned bed press for level fields
- Center fillers, to help fill center of bed
- 400 lb. Stainless steel ground driven fertilizer hopper
- Fumigation tank mounts with gas knives



December 10% Off
Replaces Model 2400

Model 2470 Mini Mulch Layer



Designed for compact tractors



Ideal for small acreage



Model 2470 with center fillers

Features

- Will lay 4' plastic; 28" bed top, with minimum 56" row spacing
- Requires minimum 50 hp with 4-wheel drive
- Adjustable 3" to 5" bed height
- Compact machine for high tunnels and small tractors
- On the go cover disk adjustment
- Adjustable weight with water tank for firmer press bed
- Adjustable tension brake on plastic roll carriers
- Replaceable, reversible plow shares
- 3/8" & 1/2" UHMW poly lined bed press
- Category I and II 3-point hitch

Options

- * Optional single or double drip attachment
- * Optional center fillers, for heavy soil





Model 2370 Flat Bed Mulch Layer Replaces Model 345



Model 2370 flat bed layer



Ideal for smaller tractors



Showing leveling blade and trench opener

Features

- Will lay 3' - 5' plastic; minimum 58" row spacing
- Requires minimum 35 hp with 4-wheel drive
- On the go cover disk adjustment
- Has extra plastic roll carrier
- 16" cover disks with dirt shields
- Compact machine has category I, 3-point hitch
- Lays clear plastic over sweet corn
- Has adjustable row markers
- Adjustable tension brake on plastic roll carriers.
- Independent disk and press wheels

Options

- * Optional depth wheel. (For sweet corn)
- * Optional single or double drip applicator

Powder Coated
Quality Baked-On Paint



Model 1670 Water Wheel Transplanter



Optional top tray & side ladder



Clear view to plastic row!!



Optional trailer\3-point combination

Features

- **Approximate tractor size: 50 to 70 hp**
- **Will plant 60" row spacing (minimum)**
- Field ready with one planting wheel
- Plants bare roots, pots, and plugs
- Capability of 8" to 36" row spacing and one to four planting wheels (Standard)
- Two 80 gallon tanks
- 18 tray capacity, 24 with top tray
- Quick change planting wheel setup
- Easy adjustment for comfort on seat and foot rest
- Large tires with highway bearings
- Side valve for washing hands
- Galvanized expanded metal trays

Options

- * Optional super wheel (spike changes to multiple sizes and spacings)
- * Optional side ladder
- * Optional top tray
- * Optional 3 and 4 seat with trays
- * Optional trailer\3-point combination
- * Quick fill (2" quick coupler connection)



Model 1270 Water Wheel Transplanter



Notice: fully open back



Clear view to the plastic row!!



Optional trailer hitch

Features

- Approximate tractor size: 35 to 60 hp
- Will plant 62" row spacing (minimum)
- Compact planter; Category I and II 3-pt. hitch
- Field ready with one planting wheel
- Plants bare roots, pots, and plugs
- Capability of 8" to 16" row spacing and one or two planting wheels (Standard)
- Two 50 gallon water tanks
- 10 tray capacity; 15 with top tray
- User friendly on the go seat adjustment
- Quick change planting wheel setup
- Galvanized expanded metal trays

Options

- * Extra top tray
- * Trailer\3-point combination

Powder Coated
Quality Baked-On Paint



Model 1800 Mulch Lifter

December 10% Off



Standard Lifter



Automatic Reset Lifter

Features

- **Approximate tractor size: 55 to 100 hp**
- **Shanks have 5/8" safety shear bolts. Auto-reset is optional**
- Will lift plastics from 3 ft. to 5 ft. wide with fast and easy adjustments
- Lifting plows uses Case I.H. 18" right and left hand "Deep-suck" Shares
- Has two spring loaded trash and vine cutting disks
- Removable center disk to cut plastic in middle
- The Challenger is build to last and make your job easier



December 10% Off

3-Row Model 2570 Mulch Layer

3-Row Machines AVAILABLE WITH ALL MODELS



3-Row Model 1670 Transplanter



3-Row Machines

December 10% Off

- **Approximate tractor size: 150 to 250 Hp**
- Flex tool bar allows each machine to flex over uneven terrain
- Tool bar designed for narrower row centers
- Compact tool bar with adjustable row spacing
- Standard cat. II & III 3-point hitch
- Compatible with most styles quick hitch
- **Optional** manual row markers for mulch laying machines
- **Optional** quick-fill, single coupler connection to fill 6 tanks at one time for 3-row transplanter



Tool bar designed for narrower row centers

OPTIONS

FOR MODEL 2570 AND 2670 PLASTIC MULCH LAYERS



Ro-Trak Sensor AUTOMATIC RO-TRAK

WHAT IS "RO-TRAK"?

"Ro-Trak" is a self-steering device for the Model 2550 and 2600 raised bed plastic mulch layers. "Ro-Trak" electronically senses when the tractor drifts sideways and hydraulically makes adjustments to minimize machine's drifting.



Fumigating Attachment

Includes:

- * Two or three fumigating knives mounted on front
- * Tank holders for two fumigation tanks and one nitrogen tank
- * Mounts on model 2570 and 2670

Not included in December Discount
Note: Seat mounts to side



Drive wheel and gear box



Front view of fertilizer hopper

Stainless Steel Dry Fertilizer Hopper

- * Approx. 400 pounds capacity
- * Ground driven for consistent fertilizer flow
- * Auger has speed selection for proper amount of fertilizer per acre


Not included in December Discount

- * 20 different speed selections
- * Operator seat mounts on side
- * Available on model 2570 and 2670
- * Hydraulic drive standard for 3-row machines



Not included in December Discount

Model 6818 Subsurface Drip Applicator

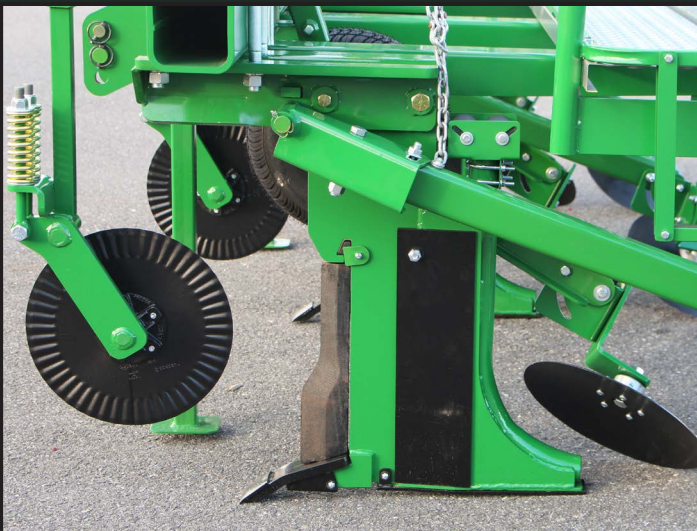

Build with replaceable wear points



Heavy duty machine for large acreage

Standard Features

- Heavy duty subsurface drip applicator with Category II and III 3- point hitch
- Depth adjustable from 4 inches to 18 inches
- 6" x 6" x 1/2" tool bar for 30"-68" row centers
- Shear bolt for rocky soil
- Convenient operator platform with hand railing
- Drip attachment has adjustable on-demand brake
- Replaceable shank tooth, and shin guard
- Replaceable hardened wear plate on side and bottom of shank
- 2" ID Stainless steel down tube for 5/8" to 1-1/8" tape
- Roller guides to prevent tape twist
- Spare roll carrier to hold 9 rolls
- 45° spool holders for fast and easy loading
- *Optional rear closure disk*



Not included in December Discount

Model 4810 Subsurface Drip Applicator



Roller guides to prevent tape twist



Replaceable shank tooth

Standard Features

- Heavy duty SDI applicator with Category II 3- point hitch
- Depth adjustable from surface to 10 inches
- 4"x4"x1/4" tool bar for 40"-68" row centers
- 2" ID Stainless steel down tube for 5/8" to 1-1/8" tape
- 45° spool holders for fast and easy loading
- Roller guides to prevent tape twist
- Replaceable shank tooth
- Shear bolt for rocky soil
- Drip attachment has adjustable on demand brake
- *Optional rear closure disk*



Not included in December Discount

Model 3803 Surface Drip Applicator



Roller guides to prevent tape twist



Abrasive resistant opener on shank

Standard Features

- Heavy duty surface applicator with Category II 3- point hitch
- Depth adjustable from surface to 3 inches
- 3"x3"x1/4" tool bar for 40"-68" row centers
- Shear bolt for rocky soil
- Roller guides to prevent tape twist
- Abrasive resistant opener for long life
- 45° spool holders for fast and easy loading
- Drip attachment has adjustable on demand brake
- *Optional rear closure disk*



~ 2021 ~

Thomas Bros. Equipment Sales, Inc.
 41764 Red Arrow Hwy.
 Paw Paw, Michigan 49079
 269-657-3735 Fax: 269-657-2110 Toll
 Free: 866-214-6135
 tbrofab@gmail.com
 www.thomasbrosequipmentsales.com

Rain-Flo

Model 1600 Transplanter Water Wheels

Planting Wheels; 12", 15", 18", 24", 30", 36", 42", 48", 52", 62", 72"12" D Strawberry45 LB \$ 135.00
 Wheels not standard spacing or spikes\$ 165.00 Wheel spacing under 12" \$ 180.00

Order Snap-On Spikes Separate

Super Wheel for snap-on spike #whl-24 Plant spacing	8"	16"	22"	28"	40"	77"	without spikes	\$ 130.00
Number Of Spikes Per-Wheel	12	6	4	3	2	1		
Super Wheel for snap-on spike #whl-26 Plant spacing	6"	12"	17"	31"	45"	86"		\$ 130.00
Number Of Spikes Per-Wheel	18	9	6	3	2	1		
Super Wheel for snap-on spike #whl-30 Plant spacing	5"	10"	14"	19"	27"	35"	51" 98"		\$ 135.00
Number Of Spikes Per-Wheel	24	12	8	6	4	3	2 1		

GROMMETS INCLUDED FREE WITH EACH SUPER WHEEL!!

Super Wheel Spike Sizes

Width at top →	← 2" →	← 1½" →	← 1¼" →	← 1⅛" →	← 1" →	← 1" →
Length →	↑ 6" ↓	↑ 5½" ↓	↑ 4½" ↓	↑ 4" ↓	↑ 3½" ↓	↑ 2½" ↓
Base →	← 4" →	← 3¼" →	← 2⅝" →	← 2¼" →	← 2" →	← 1¾" →
Snap-On Spike →	# A 3" Pots \$ 9.00	# B 2½" Pots \$ 8.00	# C Standard 50 to 72 Count tray \$ 5.00	# D 72 to 96 Count tray \$ 5.00	# E 96 to 128 Count tray \$ 5.00	# F Seeds Planting wheels only

Thomas Bros.Equipment Sales, Inc.
 41764 Red Arrow Hwy. Paw Paw,MI 49079
 269-657-3735 Fax: 269-657-2110
 Toll Free 866-214-6135
 tbrofab@gmail.com
 www.thomasbrosequipmentsales.com