



Thomas Bros. Equipment Sales Inc  
41764 Red Arrow Hwy.  
Paw Paw, MI 49079  
269-657-3735 Fax: 269-657-2110  
Toll Free: 866-214-6135  
tbrofab@gmail.com  
www.thomasbrosequimentsales.com

**Offset/in-line slope mowers  
for agriculture and green areas**






## Offset/in-line slope mowers for agriculture and green areas

The innovative and patented design places the flail head axially with respect to the tractor even if the gearbox is external to the transmission. This system utilizes a three point headstock attachment with a double linkage. One machine is able to perform the work which required use of two slope mowers: you have a bigger offset and at the same time, with a simple manual operation, you can set the flail head rear and centrally to operate along the rows.


### ***Two in one!***

***One machine = two slope mowers***

**FERRI PATENT on DOUBLE LINKAGE**

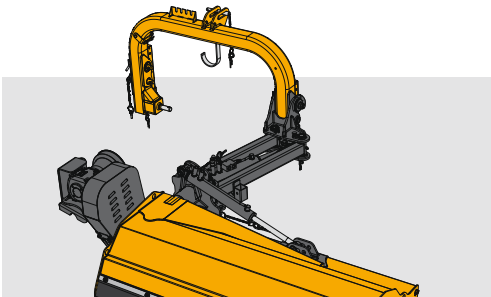

RIGHT HAND LINKAGE

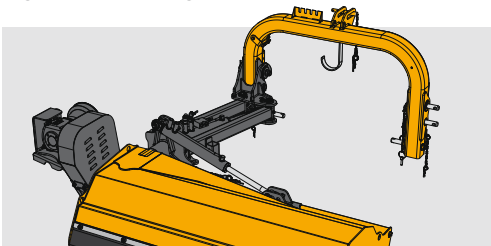

LEFT HAND LINKAGE




Gearbox unit outside the transmission cover (more offset and less PTO angle).

### **SAFETY**



Hydraulic block tap for transport with manual activation (no chains or holders).



Mechanical block pin for transport (no chains or holders).





# FERRI<sup>®</sup>



**ZMLE1400**

**ZMLE1600**

## TECHNICAL



Floating frame following the ground contours.

## RELIABILITY



Three point headstock attachment with a double linkage: one machine is able to perform the work which required use of two slope mowers.



Hydraulic side shift cylinder fitted within the parallel arms for better protection during work.

## PERFORMANCE



Adjustable Rear Roller  $\varnothing$  5.5".



Rotor internal sealed bearings.



Rotation joint on self lubricating bushing.



## Offset/in-line slope mowers for agriculture and green areas


Technical data	ZMLE	
Model	1400	1600
Cutting width	ft 4' 8"	5' 4"
Max Sidesliding*	ft 7' 10"	8' 6"
Flail head angle	48°/90°	48°/90°
Weight	lbs 961	1005
Tractor	HP/PS 40/70	40/70
Min. Tractor weight	lbs 2886	3086
Min. Tractor width	ft 5' 11"	7' 3"
Pto	MAX Rpm 540	540
Blade tip speed	ft/sec 47	47

\* Reach measured from tractor centre line to head edge


Flails	ZMLE	
Interchangeable on the same rotor	1400	1600
"Y" blades for grass, shrubs, bushes Ø max 1 1/4"	N° 54	66
Forged hammer-blades for woods, grass, twigs Ø max 1 3/4"	N° 18	22



Working positions (ft): right hand linkage		
	ZMLE1400	ZMLE1600
A	ft 7'10"	8'6"
B	ft 5'7"	5'7"
C	ft 4'8"	5'4"
D	ft 0'1.6"	0'1.6"
E	ft 5'5"	5'5"
F	ft 4'11"	4'11"
G	ft 3'4"	4'
H	ft 1'4"	1'4"

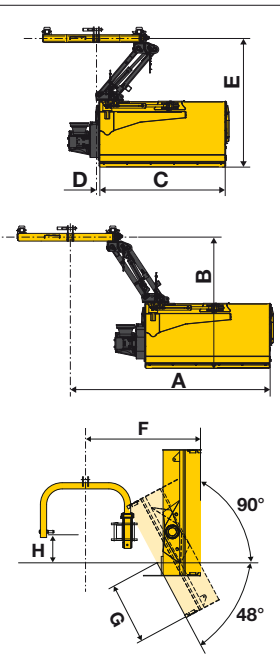

Working positions (ft): left hand linkage		
	ZMLE1400	ZMLE1600
A	ft 3'12"	4'8"
B	ft 5'7"	5'7"
C	ft 2'8"	2'8"
D	ft 2'	2'8"
E	ft 5'11"	5'11"

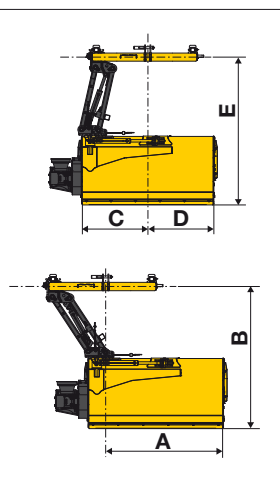

Rev.0 - 1230

ZMLE - USA - EN

campbelladv.com 61216

All data subject to change

www.ferri-america.com



**FERRI srl**  
Via Govoni, 30  
44034 Tamara (FE) Italy  
Tel. +39 0532 866866  
Fax +39 0532 866851  
info@ferrisrl.it - www.ferrisrl.it



**North America Sales and Marketing Manager / FERRI Ronald E.**  
Roglis - Glenarm, Illinois 62536  
Cell (314) 422-9460 - Fax (217) 483-4123  
ron.roglis@gmail.com

Thomas Bros. Equipment Sales Inc. \*\*Dealer  
41764 Red Arrow Hwy., Paw Paw, MI 49079  
Toll Free 866-214-6135  
tbrofab@gmail.com  
www.thomasbrosequipmentsales.com